

## **Printing Quality**

#### Darkness







0° barcode



90° barcode




Min. printable character



Graphics




# Substrate Compatibility

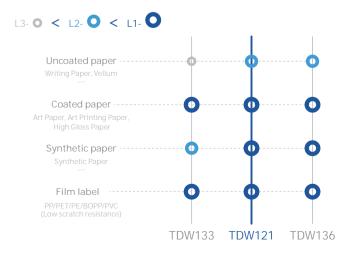

## Sensitivity

#### Printing speed






#### **Resistance Test**

#### Physical resistance

Slight exposure begins after approx. X cycles with a 680G weight load.

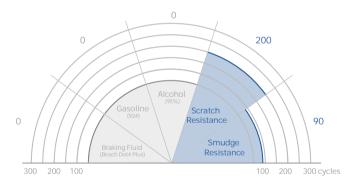

#### Water resistance test

The printed label was soaked in water at 100°C for 2 hours and then check whether the imprint of the label was significantly faded.



No significantly faded

#### Low-temperature test

The printed label was placed in a closed cold box at -17°C for 20 hours and then check whether the imprint of the label was significantly fallen off.



No significantly fallen off

## **Recommended Applications**



Receipt and delivery labels for warehouses





Pharmaceuticals



Daily chemicals



Pre-packaging



Refrigeration Industry



Hot working



Retail labels



Digital & electronics labels



Clothing tags



Labels for automobile industry



Chemical industry



Nursery gardens and flowers



Production lines



Wooden products



Steel & iron manufacturing



Fixed assets



equipment



equipment




Luggage

## **Properties**

PET film	Ribbon
Thickness: 4.5μm	Thickness: 8.6±0.3μm
Ink	
Color: black Melting point: 72±3°C	
Storage condition	
Temperature: 5~35°C Humidity: 20~80% Validity period: 12 months	

## **Product Comparison**



## **Certifications and Permits**



ROHS2.0



REACH



ISO9001/14001



**MSDS** 



**ISEGA** 



HALOGEN

# Premium Enhanced Wax Ribbon


# BARCODING THE WORLD



Hangzhou Todaytec Digital Co., Ltd.

All product specifications can be found at our website www.todaytec.com/en/







(xi) marketing@todaytec.com.cn

